

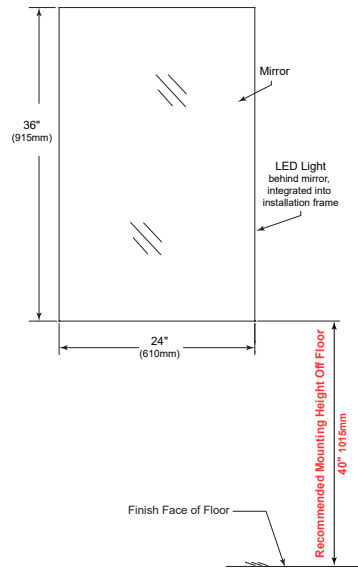


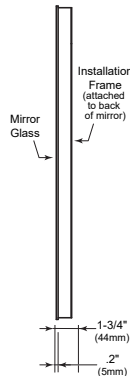

# Technical Data

Reversible LED Backlit Mirror  
B164



### STANDARD B-164 MIRRORS

#### OVERALL SIZE

MODEL NO.	W	H	D	Lumens
B-164 2436	24" (610mm)	36" (915mm)	1-3/4" (44mm)	2,500
B-164 2442	24" (610mm)	42" (1067mm)	1-3/4" (44mm)	2,900




#### Designer's Notes:

- Mirrors are manufactured to a  $\pm 0.04"$  (1mm).
- For sufficient space to lift mirror onto key hole slots allow 1".
- ADA requires that "Mirrors shall be mounted with the bottom edge of the reflecting surface no higher than 40" (1015mm) above the finished floor."

#### MATERIALS:

**Glass** — 0.19" (5mm) thick safety mirror with 0.14mm PVC film backer with frosted sandblasting.

**Extruded Back** — Aluminum channel with mounting holes.

TOOLS NEEDED (Customer Supplied):		
		
Toggle Bolts (optional)	Tape Measure	Electric Drill

#### Safety Instructions:

- Disconnect power before installing, adding or changing any component.
- To avoid a hazard to children, account for all parts and destroy all packing materials.
- Do not install any luminaire assembly closer than 6" from any combustible materials.
- This power supply must be installed according to the National Electrical Code and local building codes.

continued . . .

The illustrations and descriptions herein are applicable to production as of the date of this Technical Data Sheet. The manufacturer reserves the right to, and does from time to time, make changes and improvements in designs and dimensions.

Revised 10/16/20

