




Technical Data

Trimline Series Surface Mounted Paper Towel Dispenser Automatic Hand Dryer And Waste Bin (3 In 1 Unit)
B380309

Specify Model Required:

B-380309 115V: Automatic Hand Dryer: 110-120V AC, 8.0 Amp, 920 Watts, 50/60 Hz, Single Phase, CUListed

B-380309 230V: Automatic Hand Dryer: 208-240V AC, 3.6-4.0 Amp, 750-950 Watts, 50/60 Hz, Single Phase, CE marked, CUListed, Meets Electrical Safety Requirement AS/NZS 600335

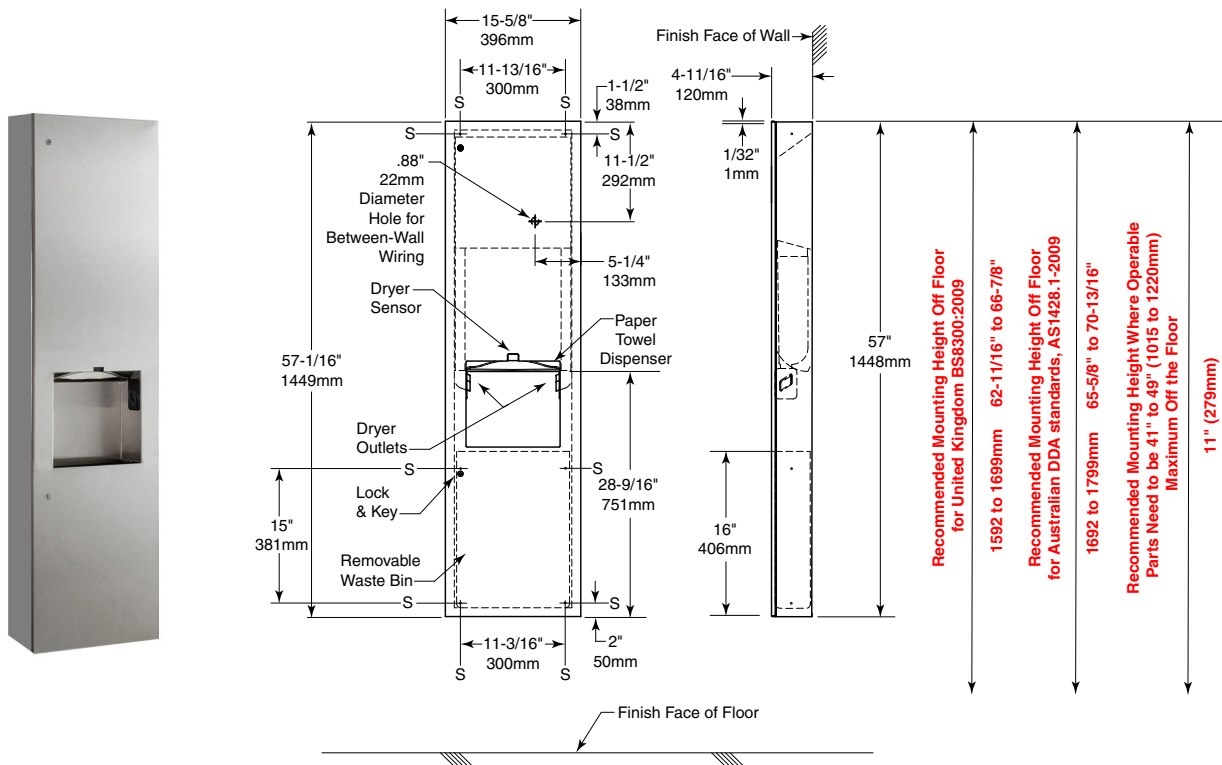

MATERIALS:

Cabinet — 18-8, type-304, heavy-gauge stainless steel. All-welded construction. Exposed surfaces have satin finish. The activation sensor mounts on a concealed panel.

Door — 18-8, type-304, 1.2mm (18-gauge) stainless steel. 14mm (9/16") 90° return for maximum rigidity. Secured to cabinet with a concealed, full-length stainless steel piano-hinge. Equipped with a stainless steel cable door-swing limiter and two tumbler locks keyed like other Bobrick washroom accessories.

Paper Towel Dispenser — 18-8, type-304, 0.8mm (22-gauge) stainless steel. Equipped with 90° return towel guide angle to prevent paper towels from falling forward out when door is opened for servicing. Rounded towel tray has hemmed opening to dispense paper towel without tearing. Capacity: 600 multifold or 450 C-fold paper towels.

Skirt: 18-8, type-304, 0.8mm (22-gauge) stainless steel. Exposed surfaces have satin finish.

TowelMate™ Towel Rod Assembly — Consisting of a round Nylon Rod and (2) stainless steel Rod Screws for attachment, is field replaceable. Stainless steel Stop Screws (2) lock TowelMate Towel Rod assembly in place.

Waste Bin — Leak-proof rigid molded plastic. Removable for servicing. Capacity: 13.7 liters (3.6 gal.).

Dryer:

Cover — 18-8, type-304, 0.8mm (22-gauge) stainless steel. Cover is secured to mounting base with two pan-head stainless steel screws.

Mounting Base — 1.5mm (20-gauge) plated steel with three 6mm (0.236") diameter mounting holes.

Motor — Universal, 1/7 hp, 8000 rpm, on resilient mounting. Sealed ball bearing at drive-shaft end and self-lubricating sleeve bearing at nondrive end. Equipped with automatic thermal-overload switch and a thermistor.

Fans — Two balanced, double-inlet centrifugal fans are mounted on motor shaft; directs airflow over heating element at 71 cfm.

Fan Housing — Fire-retardant black molded plastic.

Heating Element — Two coiled nickel-chrome heating elements are mounted in mica frame and protected by automatic thermal-overload switches. Heating elements heat air without hot spots — inaccessible to vandals.

continued . . .

The illustrations and descriptions herein are applicable to production as of the date of this Technical Data Sheet. The manufacturer reserves the right to, and does from time to time, make changes and improvements in designs and dimensions.

Revised 10/2/20



Technical Data

Trimline Series Surface Mounted Paper Towel
Dispenser Automatic Hand Dryer And Waste Bin (3 In 1 Unit)
B380309

Electronic Control — Infrared emitter receiver sensor, activation sensor PCB that is connected by two shielded wires to the dryer PCB. The sensor PCB is enclosed in a plastic housing and has an LED that flashes green when the dryer is ready, is solid green when the dryer is running and is solid red when the dryer is not ready to run.

Air Management System — Consists of two plastic ducts and two black plastic air nozzles attached to the cabinet below the towel tray.

OPERATION:

Paper towel dispenser is designed to dispense C-fold or multi-fold paper towels without use of additional adapters or towel trays. To service waste bin, unlock door with key provided and remove waste container. Cable door-swing limiter prevents damage to washroom accessories and walls. Directed air nozzles shall prevent dryer from blowing into waste container. Dryer has no-touch operation. There are two modes of operation, dryer promotion encourages use of dryer and paper promotion encourages use of paper towels. The unit is set in the factory to dryer promotion. Infrared emitter receiver sensor monitors the activation zone. Sensor LED will turn green and flash when dryer is ready for use. LED will turn red when dryer is not ready. When unit is set to dryer promotion, the dryer and green LED will turn on when hands are held under air-outlet opening and across path of sensor. Remove hands from path of sensor and dryer stops. When the unit is set to paper promotion, there is a 3 second delay before the dryer will turn on. Infrared emitter receiver sensor monitors the activation zone. Sensor LED will turn green and flash when dryer is ready for use. LED will turn red when dryer is not ready. Electronic control has automatic shutoff approximately 1-1/2 minutes after dryer turns on if an inanimate object is placed in the activation zone. After inanimate object is removed, electronic control automatically resets itself and dryer operates normally. Dryer motor will never be allowed to get hotter than 70°C.

SAFETY WARNING:

Installation and wiring must conform to current IEE Regulations for the UK and local or appropriate regulations for other countries. Installation must be completed and supervised by a qualified electrician. If the dryer in the unit fails or malfunctions, it should be disconnected from power and a qualified electrician should be called. Do not remove the dryer cover to access internal components of the dryer.

1-Year Limited Warranty — This warranty is limited to the repair or exchange of defective dryer parts at the option of Bobrick. See Installation Instruction Sheet, Form No. 38030-269, for full details.

INSTALLATION:

Mount unit on wall with six #8 x 1-1/4" (4.2 x 32mm) sheet-metal screws (not furnished) at points indicated by an S. For plaster or dry wall construction, provide concealed backing to comply with local building codes, then secure unit with sheet-metal screws. For other wall surfaces, provide fiber plugs or expansion shields for use with sheet-metal screws, or provide 1/8" (3mm) toggle bolts or expansion bolts. If unit projects above top of wainscot, provide aluminum channel or other filler to eliminate gap between cabinet and finish face of wall.

Dryer Wiring Instructions:

For 115-Volt Dryers — Connect ground wire to ground terminal marked \equiv , the black or *hot* wire to terminal marked *L1*, and neutral or white wire to terminal marked *N*.

For 208-240-Volt Dryers — Connect ground wire to ground terminal marked \equiv and the 208-240-volt wires to terminal marked *L1* and *L2*.

Notes: Electronic sensor will detect movement within 100mm (4") of air-outlet nozzle. Use caution when choosing installation location. Consider proximity to doorways and other traffic areas. For installation instructions that include step-by-step installation procedures and details of electrical service connections, see Form No. 38030-269, which is packed with each shipment. This form is also available on our website or in advance upon request.

SPECIFICATION:

Surface Mounted Paper Towel Dispenser, Automatic Hand Dryer, And Waste Bin (3-in-1 unit) shall be type-304 stainless steel with all-welded construction; exposed surfaces shall have satin finish. Door shall be 1.2mm (18-gauge); have 14mm (9/16") 90° return edges; be secured to cabinet with concealed, full-length stainless steel piano-hinges; and equipped with a stainless steel cable door-swing limiter and two flush tumbler locks keyed like other Bobrick washroom accessories. Paper towel dispenser shall be capable of dispensing 600 multifold or 450 C-fold paper towels. Unit equipped with TowelMate consisting of a 90° return towel guide angle inside cabinet to prevent paper towels from falling forward out when door is opened for servicing and a Nylon Rod across the center of the towel tray to dispense paper towels one at a time. Waste bin shall be furnished with a removable, leak-proof, rigid molded plastic waste-container with a capacity of 13.7 liters (3.6 gal.). Directed air nozzles shall prevent dryer from blowing into waste bin. Hand dryer shall have a one-piece, 18-8, type-304, 0.8mm (22-gauge) stainless steel cover. Dryer mounting base shall be 1.5mm (20-gauge) plated steel with three 6mm (0.236") diameter mounting holes. Fan housings shall be fire-retardant molded black plastic. Dryer shall be equipped with dual air outlets that run through two vertical ducts and out the black plastic nozzles under the towel dispenser. Motor shall be 1/7 hp, universal type on resilient mounting with sealed ball bearing at drive-shaft end and self-lubricating sleeve bearing at nondrive end; equipped with automatic thermal-overload switch. Heating elements shall be located on outlet side of fan, shall heat air without hot spots, be inaccessible to vandals, and protected by an automatic thermal-overload switch. The dryer will be controlled by the activation sensor which is part of the electronic control. The electronic control will never allow the dryer motor to be hotter than 70°C. Dryer shall turn off automatically when hands are removed. Sensor shall automatically shut dryer off approximately 1-1/2 minutes after dryer turns on if an inanimate object is placed in activation zone. After inanimate object is removed, electronic sensor shall automatically reset itself and dryer shall operate normally. The electronic control will have an LED that will flash green when the dryer is ready, be solid green when the dryer is running and be solid red when the dryer is not ready. Unit be CE marked and cUL listed. Unit shall comply with EU Directive "Restriction of Hazardous Substance" (ROHS) requirements for non-use of certain hazardous substances in the production of electronic products. Unit shall be protected by a limited 1-year warranty from date of purchase on all parts except motor brushes.

Surface-Mounted Paper Towel Dispenser, Automatic Hand Dryer, and Waste Bin (3-in-1 unit) shall be Model B-380309 of Bobrick Washroom Equipment, Inc., Clifton Park, New York; Jackson, Tennessee; Los Angeles, California; Bobrick Washroom Equipment Company, Scarborough, Ontario; Bobrick Washroom Equipment Pty. Ltd., Australia; and Bobrick Washroom Equipment Limited, United Kingdom.

The illustrations and descriptions herein are applicable to production as of the date of this Technical Data Sheet. The manufacturer reserves the right to, and does from time to time, make changes and improvements in designs and dimensions.

Revised 10/2/20