




Technical Data

Vandal Resistant Stainless Frameless Mirror
(Secured from Front)
B942

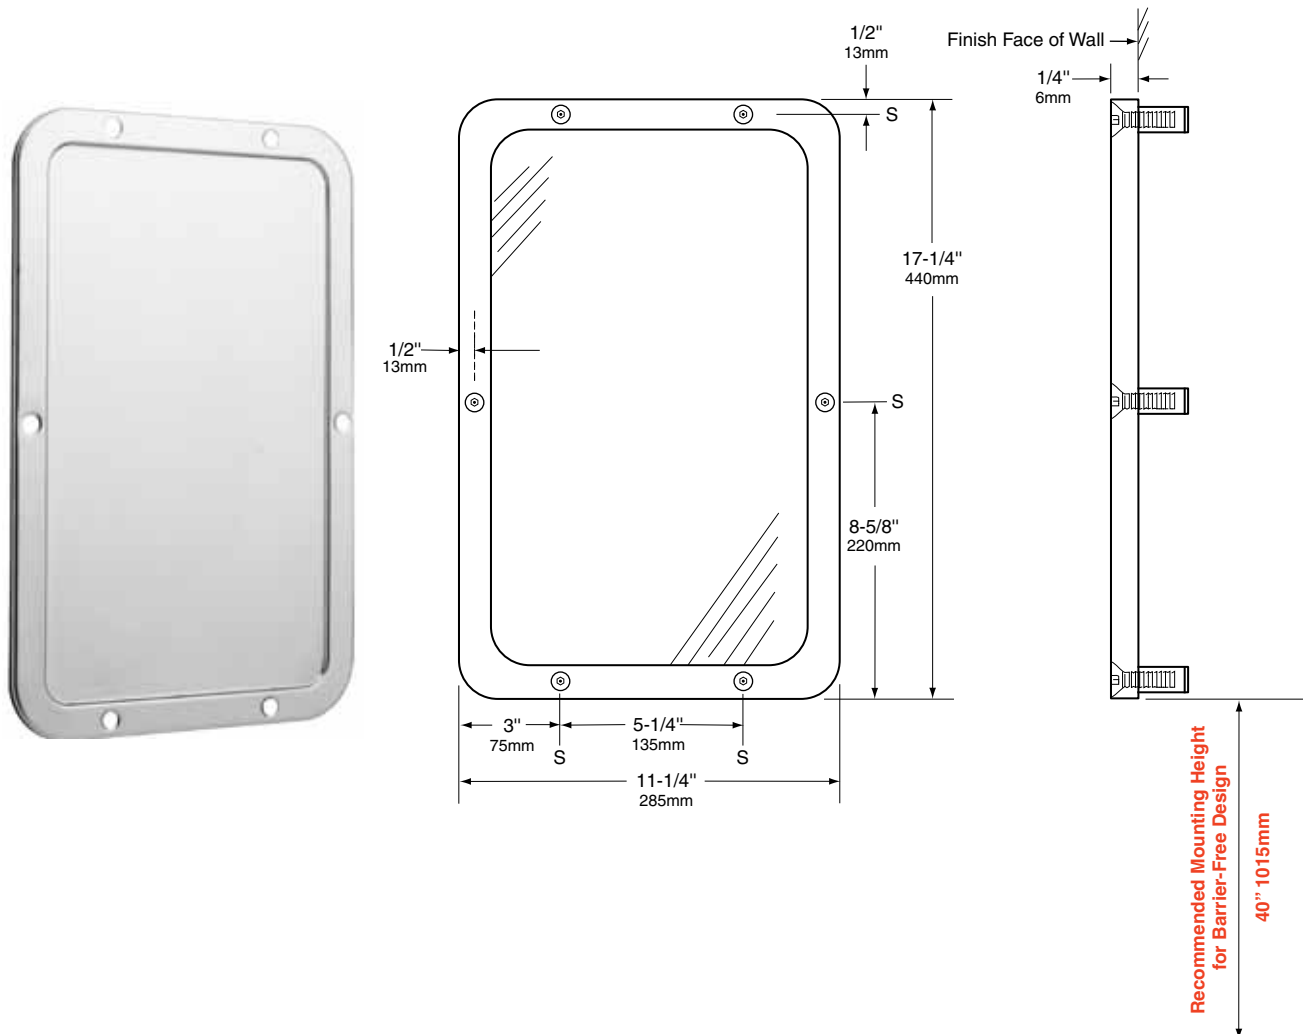

MATERIALS:

Mirror & Integral Frame — Type-430, 18-gauge (1.2mm) stainless steel with bright polished finish. Mirror has 1/4" (6mm) return.

INSTALLATION:

Secure unit to wall at all points indicated by an S. Unit has countersunk screw holes and is furnished with six 1/4-20 x 1" (6 x 25mm), tamper-resistant, flat-head, hex-socket, stainless steel machine screws and a security hex key for installation. Expansion shields are not furnished by manufacturer.

SPECIFICATION:

Frameless mirror shall be type-430, 18-gauge (1.2mm) stainless steel with bright polished finish. Mirror shall have 1/4" (6mm) return. Mirror shall be furnished with tamper-resistant mounting screws.