




## Technical Data

Trimline Series Surface Mounted  
Paper Towel Dispenser and Waste Receptacle  
B38039

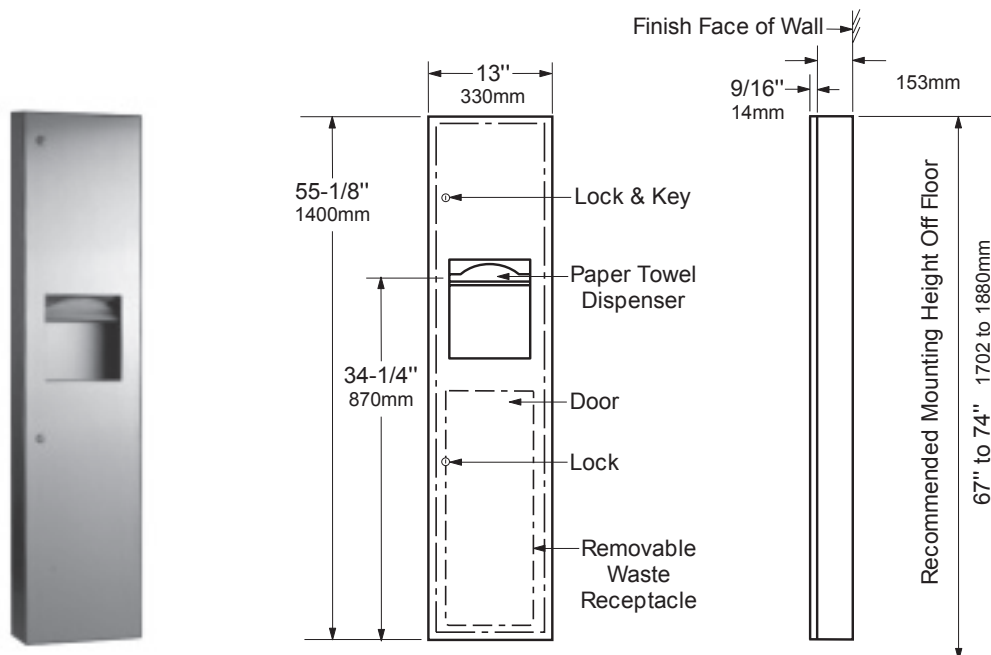

### MATERIALS:

**Cabinet & Flange** — 18-8 S, type-304, heavy-gauge stainless steel. All-welded construction.

**Skirt** — 18-8 S, type-304, 22-gauge (0.8mm) stainless steel with satin finish.

**Door** — 18-8 S, type-304, 18-gauge (1.2mm) stainless steel with satin finish. 9/ 16" (14mm) 90° return for maximum rigidity. Secured to cabinet with a concealed, full-length stainless steel piano-hinge. Equipped with a stainless steel cable door-swing limiter and two tumbler locks keyed like other Bobrick washroom accessories.

**Paper Towel Dispenser** — 18-8 S, type-304, 22-gauge (0.8mm) stainless steel. Rounded towel tray has hemmed opening to dispense paper towels without tearing. Capacity: 600 C-fold or 800 multifold paper towels.

**Waste Container** — Removable, leak-proof, rigid molded plastic. Capacity: 6.3 gal. (24.0 L).

### OPERATION:

Paper towel dispenser is adjustable to accommodate C-fold and multifold paper towels. To service waste receptacle, unlock door with key provided and remove waste container. Cable door-swing limiter prevents damage to washroom accessories and walls.

### INSTALLATION:

Surface mount unit on specified wall with fixings (not furnished) as required. Drill holes to suit. For plaster or dry wall construction, provide concealed backing to comply with local building codes, then secure unit with sheet-metal screws. For other wall surfaces, provide fiber plugs or expansion shields for use with sheet-metal screws, or provide 1/ 8" (3mm) toggle bolts or expansion bolts. If unit projects above top of wainscot, provide aluminum channel or other filler to eliminate gap between cabinet and finish face of wall.

### SPECIFICATION:

Surface-mounted paper towel dispenser and waste receptacle shall be type-304 stainless steel with all-welded construction; exposed surfaces shall have satin finish. Door shall be 18 gauge (1.2mm); have 9/ 16" (14mm) 90° return; be secured to cabinet with a concealed, full-length stainless steel piano-hinge; and equipped with a stainless steel cable door-swing limiter and two tumbler locks keyed like other Bobrick washroom accessories. Paper towel dispenser shall be capable of dispensing 600 C-fold or 800 multifold paper towels. Waste receptacle shall be furnished with a removable, leak-proof, rigid molded plastic waste-container with a capacity of 6.3 gal. (24.0 L). Manufacturer's service and parts manual shall be provided to the building owner/ manager upon completion of project.

**Surface-Mounted Paper Towel Dispenser And Waste Receptacle shall be Model B-38039 of Bobrick Washroom Equipment, Inc., Clifton Park, New York; Jackson, Tennessee; Los Angeles, California; Bobrick Washroom Equipment of Canada Ltd., Scarborough, Ontario; Bobrick Washroom Equipment Pty. Ltd., Australia; and Bobrick Washroom Equipment Limited, United Kingdom.**

The illustrations and descriptions herein are applicable to production as of the date of this Technical Data Sheet. The manufacturer reserves the right to, and does from time to time, make changes and improvements in designs and dimensions.

Revised 4/09