




## Technical Data

Panel Mounted Soap Dispenser  
B8601

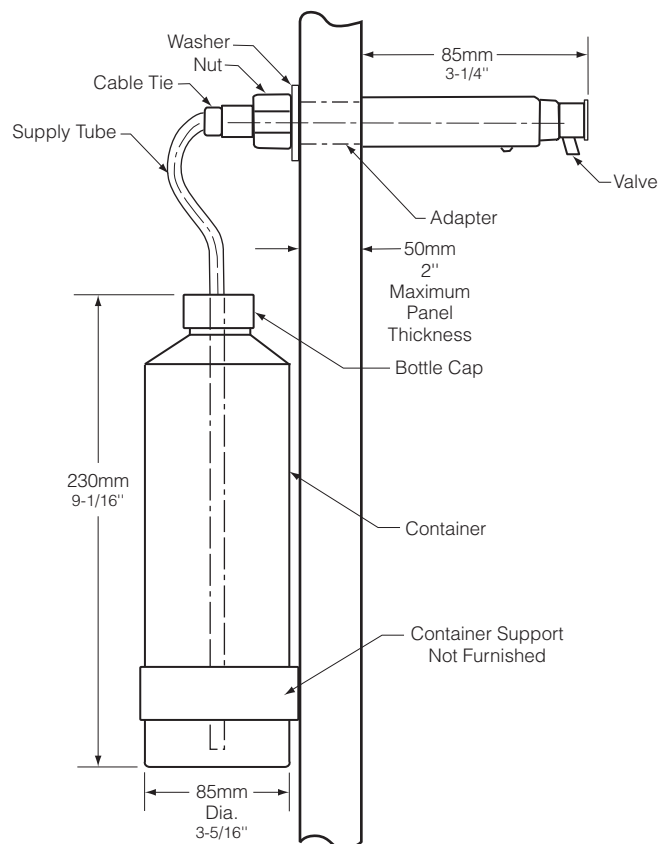

### MATERIALS:

**Valve** — Chrome-plated brass cylinder. Stainless steel spring. U-packing seal and duckbill. Corrosion-resistant to most soaps and detergents. Equipped with nut, washer, cable tie, supply tube, and PVC mounting adapter.

**Container** — Translucent, shatter-resistant polyethylene. Capacity: 1.0-L (34-fl oz).

### OPERATION:

Push-in valve dispenses vegetable-oil liquid soaps, viscous lotion soaps, and synthetic detergents. Valve is operable with one hand, without tight grasping, pinching, or twisting of the wrist, and with less than 22.2 N (5 lbf) to comply with barrier-free accessibility guidelines.

### INSTALLATION:

Valve is designed for installation through 18mm (23/32") diameter hole in 32 to 50mm (1-1/4" to 2") thick panel. Thread sealing tape, such as Teflon tape or similar, is recommended as a sealant on the exposed threads of the adapter where the soap valve threads onto it.

### SPECIFICATIONS:

Soap valve shall dispense vegetable-oil liquid soaps, viscous lotion soaps, and synthetic detergents. Valve shall be equipped with chrome-plated brass cylinder, stainless steel spring, U-packing seal, and duckbill. Adapter shall accommodate mounting thicknesses up to 50mm (2"). Translucent, shatter-resistant polyethylene container shall have a capacity of 1.0-L (34-fl oz). Manufacturer's service and parts manual shall be provided to the building owner/manager upon request.

**Panel-Mounted Soap dispenser shall be Model B-8601 of Bobrick Washroom Equipment, Inc., Clifton Park, New York; Bobrick Washroom Equipment Bobrick; Jackson, Tennessee; Los Angeles, California; Bobrick Washroom Equipment Pty. Ltd., Australia; and Bobrick Washroom Equipment Limited, United Kingdom.**

The illustrations and descriptions herein are applicable to production as of the date of this Technical Data Sheet. The manufacturer reserves the right to, and does from time to time, make changes and improvements in designs and dimensions.

Revised 9/07