


Rynat Model R-FS2100 Specification Guide

Floating Cubicle Partitioning System 2100mm High



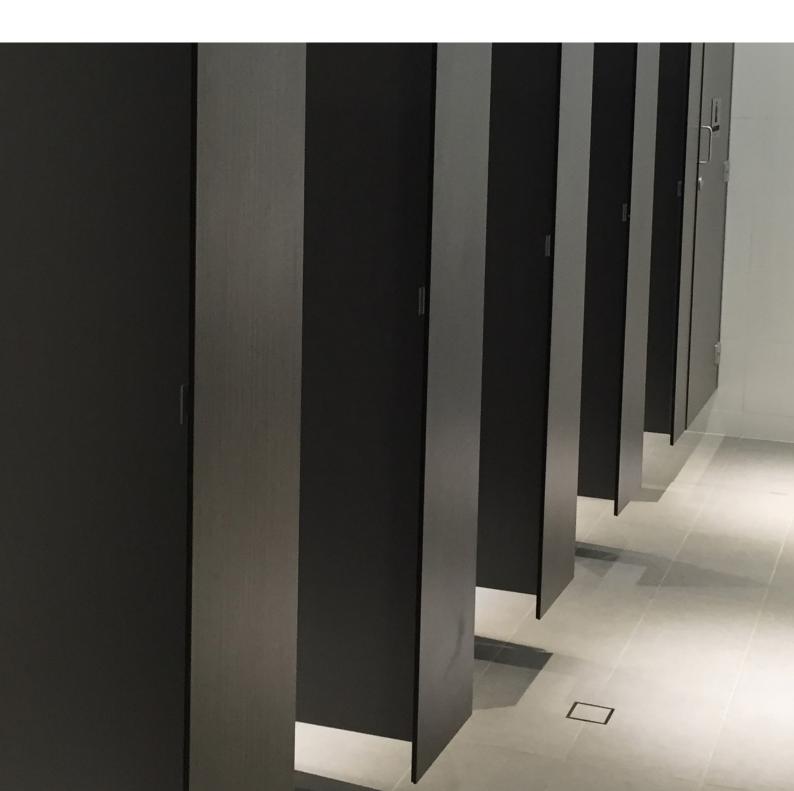

Specification Guide

Rynat Model R-FS2100

Scope

Supply and Install pre-fabricated complete compartments / enclosures including doors, panels, hardware and trims

Compliance

Comply with all current Standards, Building Codes and National Codes of Compliance including but not limited to the following:

AS1428.1 Design for access and mobility AS1428.2 Enhanced and additional requirements – Buildings and Facilities AS1428.3 Requirements for children and adolescents with physical disabilities NCC F2 Sanitary and other facilities NCC F2.4 Accessible sanitary facilities NCC F2.5 Construction of sanitary compartments

Manufacturer: Rynat Industries Australia. Contact 1300 558 518 Model: R-FS2100 Rynat Floating Partitioning System

Materials

Door Material: 13mm Compact Laminate Panel Material: 13mm Compact Laminate Hardware Type: Omega Style Red and Green Indicator, Turnbolt, Staple and Bumper Quantity 3 Gravity Hinges Per Door Coat Hooks Rubber Tipped – One coat hook per cubicle

Dimensions

Overall Height: 2100mm Overall Depth: 1500mm – 1800mm (refer to drawings) Frontal Panels: 2100mm high including 100mm floor clearance End Nib Panels: 2100mm high including 100mm floor clearance WC Division Panels: 2100mm high including 100mm floor clearance Shower Division Panels: 2100mm high concealed fixed directly to the floor with 100mm cut out (recessed 350mm back from the frontal WC/Shower Division Panels: 2100mm high concealed fixed directly to the floor with 100mm cut out (recessed 350mm back from the frontal WC/Shower Division Panels: 2100mm high concealed fixed directly to the floor with 100mm cut out (recessed 350mm back from the frontal Shower Splash Panels: 2100mm high mounted directly to the floor Shower Seats: 880mm wide x 295mm deep (approx) fixed with aluminium angle

Doors

Standard Doors: 2100mm high x 600mm wide including 100mm floor clearance Ambulant Doors: 2100mm high x 725mm wide including 100mm floor clearance

Wall Channel: All panels are secured to the adjacent walls/division panels with Aluminium U Channel Overhead Rail: Aluminium Oval Headrail mounted across the top of the division panels recessed 250mm back from the frontal panels Colours: Refer to Finishes Schedule Fixings: 304 Grade Stainless Steel Shop Drawings: Provide detailed Shop Drawings for the Superintendent's approval prior to manufacture Installation: Must comply with manufacturer's written instructions

Warranty 10 Years

Installation: Lifetime Guarantee (subject to Rynat's approved installer) Hardware: 2 year Manufacturers Warranty



TOILETS | SHOWER CUBICLE PARTITIONING SYSTEMS LOCKERS | BENCH SEATS | HOOK STRIPS